

A Quick Method to Assess Rodent Cage Ammonia Levels

Laurel Thomas, Caitlin Montgomery BS and Jeffrey Wimsatt*

Department of Medicine, School of Medicine, West Virginia University, Morgantown, WV 26506, USA

*Corresponding author: Jeffrey Wimsatt, Department of Medicine, School of Medicine, West Virginia University, Morgantown, WV 26506, USA, Tel: 304-293-2721; E-mail: jwimsatt@hsc.wvu.edu

Rec date: Dec 30, 2016; Acc date: Feb 08, 2016; Pub date: Feb 10, 2016

Copyright: © 2016 Thomas L, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Introduction

Ammonia toxicity causes biochemical [1,2] and mid-respiratory [3] and nasal epithelial damage [4,5]. In rodent housing situations, ammonia is often used as a bio-indicator to assess rodent well-being, and directly applicable to a wide array of housing and management regimes [6]. OSHA standards are often cross-applied to rodents in lieu of established regulatory standards for them. However, unlike humans in the work place, rodents generally do not leave their cage environment for every long. Modern rodent caging may be static or ventilated, but newer caging in general is self-contained and limits outside air exchanges. Here we attempt to adapt aquarium ammonia test strips to see as a quick assessment of cage level ammonia concentrations by comparing values obtained with these strips to independently measured values. We then evaluated them under real-life conditions through time in statically caged mice as a practical demonstration of their potential utility.

Keywords: Rodent; Ammonia toxicity; Cage; Mice

Materials and Methods

Milli-pore® water was used throughout. A hermetically sealed rat cage (BCU®, Allentown, NJ) maintained at room temperature was used to produce a standard curve relating independently measured decreasing ammonia concentrations to time to maximum color change of water pre-moistened ammonia strips (Tetra EasyStrips® Ammonia Aquarium Test Strips; Cat. #19542-00). Independently, ammonia concentrations were measured with a RKI Eagle II Gas Monitor (Union City, CA; sensitive to 0.1 ppm ammonia) that was pre-

calibrated with a known ammonia gas standard according to the manufacturer's instructions prior to use. Increasing ammonia (Ammonia hydroxide; Sigma # 05002) concentrations were measured and tested (time to maximum color change as shown on the container) in triplicate by first placing 10 µl of each Ammonia concentration in a petri dish inside at the center of the cage. Each sample was allowed to equilibrate 10 min, so that stable gas monitor measurements could be made. Twenty-six different ammonia solutions of varying concentrations were measured by analyzer and with test strips.

As a demonstration of their utility, 5 static cages (Allentown NextGen® mouse cages; Allentown, NJ) bedded to ½" depth using 3/8" diameter corncob bedding, were populated with 3 GRHL2-floxed black mice; all cages were set adjacent to each other on the same shelf. Animals were supplied with water and food (Envigo 2018) ad lib. Cage tops were of the molded polysulfone type fitted with Remya® filters and external water bottles so the water bottle port could be used for sampling. Both analyzer and test strip (in replicate) measurements were taken at the same time daily until a threshold value of 20 ppm was exceeded and a cage change was needed. Room humidity and temperature, and water bottle weight were recorded daily to determine consumption.

Results

A standard curve was created by comparing the time for full aquarium test strip change (X=sec) to analyzer ammonia levels (Y=ppm). When plotted, the data fit a power curve with the following equation: $Y=115.24X^{-0.834}$ with an $R^2=0.95$ (Figure 1).

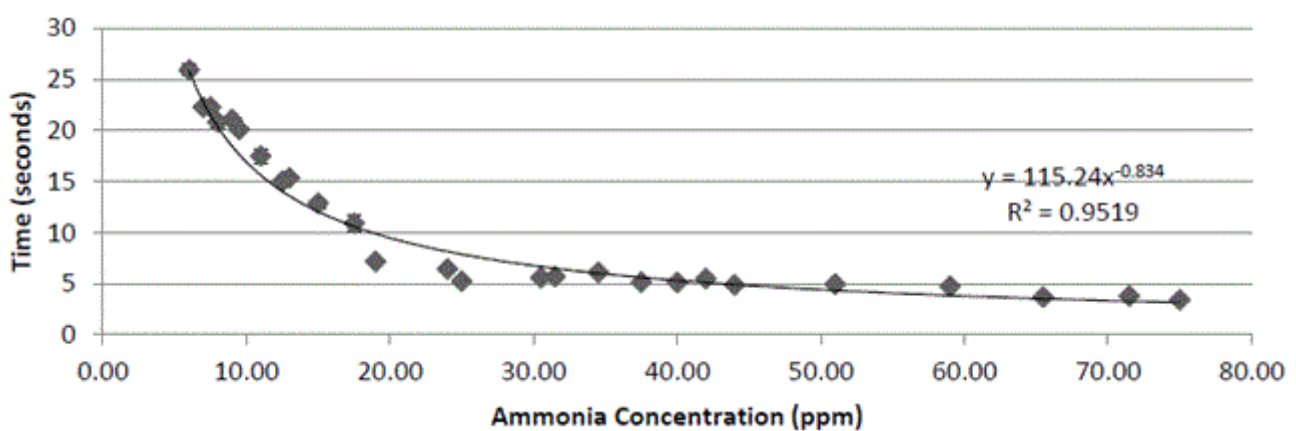


Figure 1: Standard Curve.

Table 1 summarizes useful milestones that were developed for monitoring rodent cages based on published work. Daily ammonia levels from static cages increased gradually until there was a precipitous increase. Ammonia levels precipitously exceeded 20 ppm in 1 cage on the 9th day, in 3 cages on the 10th day, and in 1 cage on the 11th day. Strong agreement of the monitor readings and time required

for indicator strips to reach the full green were noted when sampling through the water bottle port without removing the outer molded cage top was used. During the study period, room temperature and humidity levels did not undergo wild excursions; temperature ranged 70.7°F-75.2°F and relative humidity ranged 44%-56%.

Criterion Used	Concentration/Time	Test Strip Color Change time	Literature adapted Rodent cut-offs (ppm)	Rodent Literature Reference
PEL	50 ppm/8 h	~ 6 sec	<100 ≤ 7 d	[7]
REL	25 ppm/10 h	~ 8 sec	100/6 h	[8]
WVU Standard	>20 ppm	>7 sec	~ 25 for 4 m	[9]

Table 1: Common cut-offs based on human OSHA standards and conservative threshold values derived from the rodent literature are shown. The OSHA standards for ammonia exposure are highlighted in dark grey [10]. WVU's adopted standard is highlighted in light grey. Since the test strips only provide a point estimate, more conservative values were selected for our use. Other convenient test strip metrics include: 10-15 sec corresponds to 10-20 ppm; <10 sec corresponds to ≥ 20 ppm; <5 sec corresponds to ≥ 40 ppm (+). REL=recommended exposure limit; PEL=permissible exposure limit.

Table 2 summarizes ammonia levels as determined independently in five static cages with the Eagle II unit, and as determined separately using moistened ammonia test strips and the standard curve in Figure 1. Cages were not opened during the complete testing period and access was gained for testing through the water bottle port. Water

consumption is reported. Cage level room relative humidity and temperature during the study period were relatively stable. Temperature and humidity (mean ± s.e.) were 52.3 ± 1.2°F and 72.3 ± 0.4% respectively during the study period.

Day	1	2	3	4	5	6	7	8	9	10	11	12
Reference*	0.0	0.0	0.3	0.0	0.0	0.3	0.5	0.6	15.4	1.7	43.3	52.0
Reference se	0.0	0.0	0.1	0.0	0.0	0.1	0.0	0.1	14.9	0.8	14.6	-
EasyStrip®	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.7	15.5	1.3	40.9	40.9
EasyStrip® se	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	14.9	0.5	13.8	-
Water Consumed	12.0	12.0	12.0	13.2	12.8	14.4	14.4	15.2	14.0	15.2	13.0	18.0
Water se	0.5	0.4	0.6	0.8	1.2	2.4	0.7	0.5	0.6	1.0	0.9	-
No. of Cages	5	5	5	5	5	5	5	5	5	4	4	1

Table 2: Summary of daily ammonia (ppm) measured independently after reference gas pre-calibration using an Eagle II® gas monitor*, and as estimated using EasyStrips®. Cages remained closed during the complete study period. Ammonia values were obtained by insertion of the monitor probe or distilled water remoistened strips the same distance into each static cage through the water bottle port. Daily water consumption was measured. Each cage was only monitored until ammonia methods indicated ammonia exceeded 20 ppm. Ammonia is reported in ppm, and water in mL consumed. During the 12 day study period, room temperatures at the cage level averaged 72.3 ± 0.4 °F, and room relative humidity was 52.3 ± 1.2%. Values are expressed as mean ± s. e.

Discussion

For short exposure periods in rats, ammonia causes minimal systemic effects except at extremely high levels (e.g., >100 ppm) [7]. Even when not clinically recognized, elevated ammonia may significantly affect drug studies and liver function [11] and may contribute to elevated corticosterone values [9]. Excessive ammonia accumulation emerges with reduced cage changing frequency [10], in the presence of inadequate ventilation [9,12], under conditions of higher humidity, and with increased animal densities or nitrogen load [13]. Certain bedding types accentuate ammonia production [14,15] while excessive ventilation rates may affect breeding success (Wimsatt, unpublished data). Test strip detection of ammonia levels allows a

more refined approach, and may reduce costs, human labor and occupational risks; testing by this means has advantages in that it is simple, rapid, and relatively cost effective (~ \$1 retail per test strip). Frequent cage changing may have adverse effects on body condition [16] and behavioral measures [17]. Likewise, in biocontainment settings, minimizing cage changes reduces worker exposure risk. Threshold ammonia screening is easily implemented by any animal care worker during routine animal care (e.g., >7 sec for the strip to turn fully green indicates >20 ppm has been reached in that cage). Initial rodent cage testing suggests ammonia levels can change rapidly and the importance of measuring levels often in high risk situations.

Acknowledgements

The authors would like to thank Frank Ali for logistical help. L. T. received support from a Henry W. Hurlbutt Memorial Research Award, Department of Biology, West Virginia University.

References

1. Gubeeva EG, Spiridonov VA, Zubkova AN (2015) The specific morphological and biochemical features of inhalation poisoning with ammonia. *Sud Med Ekspert* 58: 32-35.
2. Gaafar H, Girgis R, Hussein M, el-Nemr F (1992) The effect of ammonia on the respiratory nasal mucosa of mice. A histological and histochemical study. *Acta Otolaryngol* 112: 339-342.
3. Gamble MR, Clough G (1976) Ammonia build-up in animal boxes and its effect on rat tracheal epithelium. *Lab Anim* 10: 93-104.
4. Mexas AM, Brice AK, Caro AC, Hillanbrand TS, Gaertner DJ (2015) Nasal Histopathology and Intracage Ammonia Levels in Female Groups and Breeding Mice Housed in Static Isolation Cages. *J Am Assoc Lab Anim Sci* 54: 478-486.
5. Pinson DM (1986) Evaluation by scoring and computerized morphometry of lesions of early *Mycoplasma pulmonis* infection and ammonia exposure in F344/N rats. *Vet Pathol* 23: 550-555.
6. Gonder JC, Laber K (2007) A renewed look at laboratory rodent housing and management. *ILAR J* 48: 29-36.
7. Schaerdel AD, White WJ, Lang CM, Dvorchik BH, Bohner K (1983) Localized and systemic effects of environmental ammonia in rats. *Lab Anim Sci* 33: 40-45.
8. Vesell ES, Lang CM, White WJ, Passananti GT, Hill RN, et al. (1976) Environmental and genetic factors affecting the response of laboratory animals to drugs. *Fed Proc* 35: 1125-1132.
9. Reeb-Whitaker CK (2001) The impact of reduced frequency of cage changes on the health of mice housed in ventilated cages. *Lab Anim* 35: 58-73.
10. Memarzadeh F (2004) Comparison of environment and mice in static and mechanically ventilated isolator cages with different air velocities and ventilation designs. *Contemp Top Lab Anim Sci* 43: 14-20.
11. Reeb C (1998) Micrenvironment in ventilated animal cages with differing ventilation rates, mice populations and frequency of bedding changes. *JAALAS* 37: 43-49.
12. Serrano LJ (1971) Carbon dioxide and ammonia in mouse cages: effect of cage covers, population and activity. *Lab Anim Sci* 21: 75-85.
13. Potgieter FJ, Wilke PI (1996) The dust content, dust generation, ammonia production, and absorption properties of three different rodent bedding types. *Lab Anim* 30: 79-87.
14. Smith E, Stockwell JD, Schweitzer I, Langley SH, Smith AL (2004) Evaluation of cage micro-environment of mice housed on various types of bedding materials. *Contemp Top Lab Anim Sci* 43: 12-17.
15. Beynen AC, van Tintelen G (1990) Daily change of cage depresses mass gain in mice. *Z Versuchstierkd* 33: 106-107.
16. Duke JL, Zammit TG, Lawson DM (2001) The effects of routine cage-changing on cardiovascular and behavioral parameters in male Sprague-Dawley rats. *Contemp Top Lab Anim Sci* 40: 17-20.
17. OSHA (2009) Ammonia.