

Assessment of Physico-chemical Water Quality of Bira Dam, Bati Wereda, Amhara Region, Ethiopia

Tessema A^{1*}, Mohammed A¹, Birhanu T² and Negu T³

¹Department of Biology, Wollo University, Dessie, Ethiopia

²Tehulederie Wereda Office of Water Resource Development, Hayq, Ethiopia

³Kemissie Zonal Agriculture Office, Ethiopia

Abstract

Bira dam was constructed in Bati district in 1986 through the aid of International Red Cross Association for food security purpose. The study was conducted from January to September 2013. The objective of the study was to assess physico-chemical parameters of Bira dam. Current total area, average depth of the reservoir were measured using GPS and rope respectively, physico-chemical parameters were taken monthly from January to September 2013 from three sites. Digital Multimetre were used to measure pH, Temperature, conductivity and Turbidity value. SPSS Version 16 was used to analyze the collected data. Univariate test was used to test the physico-chemical parameters difference among sites and months. The mean value of pH, Temperature, Turbidity and conductivity 7.02, 24.11°C, 24.60 NTU and 399.00 µS/cm respectively. There was no significant difference in all physico-chemical parameters among sites ($P>0.05$). There was significant difference in water Temperature, Turbidity and conductivity by month ($P<0.05$). The current total area of the dam is 18 hectare which was 42 hectare when the dam was constructed; the depth also reduces from 20 to 4.33 m. Since the watershed of the dam is highly degraded, the dam will be totally dried if the situation continues. The turbidity value of Bira dam was higher than most studied dams in Ethiopia, therefore watershed of the dam should be properly managed though full participation of dam users.

Keywords: Millimeters; Turbidity; Red cross; Physico-chemical parameters; Conductivity; Association; Temperature

Introduction

Ethiopia is uniquely rich in water resources. It has numerous water bodies including ponds, lakes, rivers, reservoirs and wetlands. Based on the estimation of FAO [1,2] the surface area of major lakes and reservoirs is 7,334 Km² and the length of rivers is 7,185 km.

Ethiopia could be called a water tower of Eastern Africa in a continent where its most part is arid. The inland water body of Ethiopia is estimated at about 7,400 km² of lake area and about 7,000 km total length of [3]. These water bodies contain large population of commercially important fish species. However, the territory of Ethiopia seems to be among regions of the African continent which are least explored in ichthyofauna perspectives [4].

The development of aquatic life (flora and fauna) in surface waters is influenced by a variety of environmental conditions that determine the species as well as the physiological performance of individual organisms. The flora and fauna present in specific aquatic systems are a function of the combined effects of various hydrological, physical and chemical factors [5]. Aquatic ecosystems are dynamic and their tropic state is controlled by physical and chemical conditions. Thus, monitoring and evaluating the tropic state of lakes have become an essential prerequisite to develop control mechanisms.

Expanding human population brought about by the opportunities of good water supply, irrigation, fish production recreation and navigation offered by reservoirs has put enormous pressure and stress on the quality of water impounded by the reservoir. The impact of human activities in and around the reservoir is felt on the unique physical and chemical properties of water on which the sustenance of fish that inhabit the reservoir is built as well as to the functions of the reservoir. Water quality is determined by the physical and chemical limnology of a reservoir [6] and includes all physical, chemical and biological factors of water that influence the beneficial use of the water. Water quality is important in drinking water supply, irrigation, fish

production, recreation and other purposes to which the water must have been impounded.

Water quality deterioration in reservoirs usually comes from excessive nutrient inputs, eutrophication, acidification, heavy metal contamination, organic pollution and obnoxious fishing practices. The effects of these “imports” into the reservoir do not only affect the socio-economic functions of the reservoir negatively, but also bring loss of structural biodiversity of the reservoir [7,8] have used the physico-chemical properties of water to assess the water quality of a reservoir. The use of the physico-chemical properties of water to assess water quality gives a good impression of the status, productivity and sustainability of such water body. The changes in physical characteristics like temperature, transparency and chemical elements of water such as dissolved oxygen, chemical oxygen demand, nitrate and phosphate provide valuable information on the quality of the water, the source(s) of the variations and their impacts on the functions and biodiversity of the reservoir.


The quality of surface water has deteriorated in many countries in the past few decades. As a result of the growing population, increasing industry, agriculture, and urbanization, the inland water bodies are confronted with the increasing water demand, as facing with extensive anthropogenic inputs of nutrients and sediments, especially the lakes and reservoirs [9]. To handle this problem, it is necessary to carry out water quality assessment, planning, and management, in which water

***Corresponding author:** Tessema A, Wollo University, Department of Biology, Dessie, Ethiopia, E-mail: atecklie@yahoo.com

Received June 11, 2014; **Accepted** June 23, 2014; **Published** October 03, 2014

Citation: Tessema A, Mohammed A, Birhanu T, Negu T (2014) Assessment of Physico-chemical Water Quality of Bira Dam, Bati Wereda, Amhara Region, Ethiopia. J Aquac Res Development 5: 267. doi:[10.4172/2155-9546.1000267](https://doi.org/10.4172/2155-9546.1000267)

Copyright: © 2014 Tessema A, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

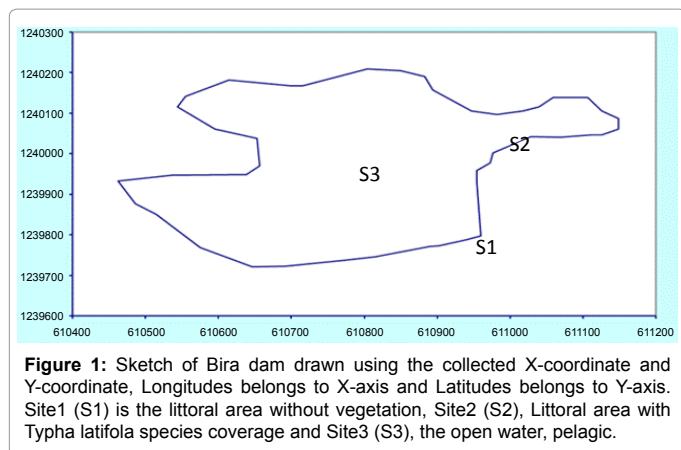

and maize) and livestock rearing. Livestock production is constrained by lack of grazing and access to fodder. Local agricultural labor, migration labor and firewood sale are important income generating activities particularly for poorer households (Figure 1) [11].

Methods

Physico-chemical parameters: Physico-chemical parameters conductivity in $\mu\text{s}/\text{cm}$, pH, Turbidity in NTU and temperature in $^{\circ}\text{C}$ were measured using digital multimetres in three sites, S1, S2 and S3 from January to June 2013.

Data analysis: Descriptive Statistics (mean, graphs) and inferential statistics (Univariate analysis) were used through SPSS Version 16 application.

Result and Discussion

Physico-chemical parameters

Most of the values of Physico-chemical water quality parameters during sampling months were in the optimum condition for fish production except for higher Turbidity value [12]. As stated below in Table 1, except pH, temperature, conductivity and Turbidity showed significant difference among sampling months ($P < 0.05$). There were no significant difference in water quality parameters among the three sites ($P > 0.05$) (Table 2).

		Sum of Squares	Df	Mean Square	F	Sig.
pH * Month	Between Groups (Combined)	1.346	5	.269	.328	.886
	Within Groups	9.846	12	.821		
	Total	11.192	17			
Temp * Month	Between Groups (Combined)	62.518	5	12.504	22.574	.000
	Within Groups	6.647	12	.554		
	Total	69.165	17			
Turbidity * Month	Between Groups (Combined)	1542.401	5	308.480	4.338	.017
	Within Groups	853.413	12	71.118		
	Total	2395.814	17			
Con * Month	Between Groups (Combined)	12778.000	5	2555.600	48.989	.000
	Within Groups	626.000	12	52.167		
	Total	13404.000	17			

Table 1: Physico-chemical parameters variation among the different sampling months.

quality monitoring plays an important role [10]. This study aimed at assessing the water quality of Bira dam used for irrigation, livestock watering and fish production using some selected physico-chemical parameters. The results will form the baseline for monitoring and tracking changes in the water quality as a result of the dam's natural dynamics over time and impact of main activities on the dam and its watershed.

Objectives

General objective

The main objective of the study was to assess physico-chemical parameters of Bira dam to check the dam suitability for fish stocking.

Specific objective:

- To assess physico-chemical parameter of Bira dam.

Material and Methods

Study area

Bira kebele is one of the kebeles of Bati Woreda where Bira dam is found that was constructed for irrigation purpose by Red Cross. The dam at the beginning when it was constructed had a depth of 15 to 20m and a total area of 42 hectare, but recently its area reduced to 18.33 hectares due to siltation (Figure 1). Bati is one of the districts in Oromia zone that has different culture attracting tourists especially on market day, Monday. The economy is based on crop production (sorghum, teff

pH




The pH is an important variable in water quality assessment as it influences many biological and chemical processes within a water body and all processes associated with water supply and treatment [13]. In unpolluted waters, pH is principally controlled by the balance between the carbon dioxide, carbonate and bicarbonate ions as well as other natural compounds such as humic and fluvic acids. Changes in pH can indicate the presence of certain effluents, particularly when continuously measured and recorded, together with the conductivity of a water body. Dial variations in pH can be caused by the photosynthesis and respiration cycles of algae in eutrophic waters. The pH of most natural waters is between 6.0 and 8.5, although lower values can occur in dilute waters high in organic content, and higher values in eutrophic waters, Groundwater brines and salt lakes [13]. The desirable pH range for fish is between 6.5- 9. Long term exposure to pH values beyond these limits slows fish growth and reduces health. Exceedingly alkaline water (greater than pH 9) is dangerous as ammonia toxicity increases rapidly. At higher temperatures fish are more sensitive to pH changes. The mean pH value of Bira dam ranged from 6.6 -7.3 almost similar with Tekeze dam and lower than Hashenge (8.4). The Bira dam pH value is suitable for fish production and its variation among sites described in Figure 2.

Water temperature

Fish are exothermic, their body temperature is about that of the surrounding environment; and affects all metabolic processes. Cold

	Site	pH	Temperature	Conductivity	Turbidity
Site1	Mean	6.9400	23.967	393.83	21.265
	Std. Deviation	.40714	2.4977	30.413	4.7235
Site2	Mean	6.6600	24.350	401.17	25.268
	Std. Deviation	.95714	2.0047	28.646	18.3661
Site3	Mean	7.4667	24.033	402.00	27.258
	Std. Deviation	.86832	1.8640	29.779	9.8578

Table 2: Physico-chemical parameters variation among sampling sites during sampling months.

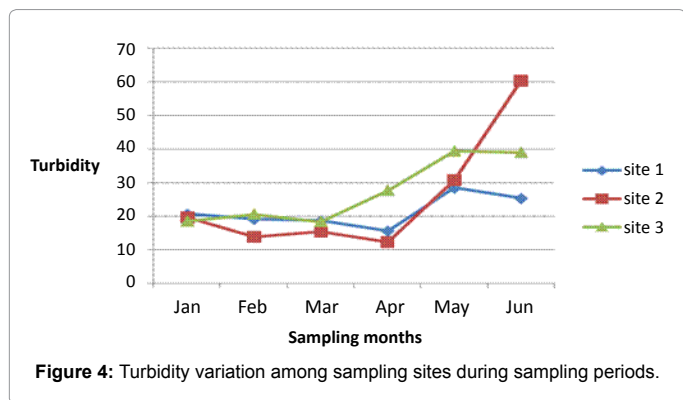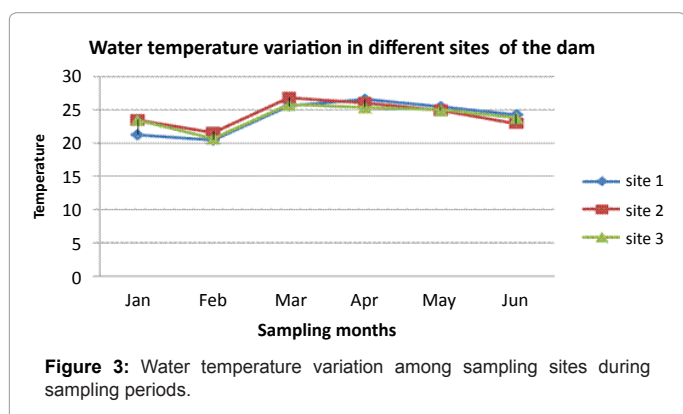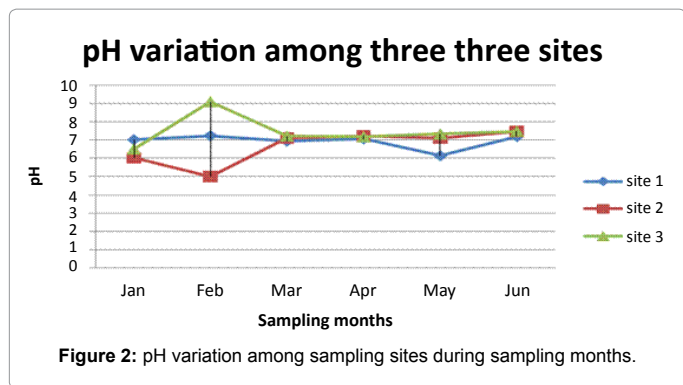

water slows metabolism and warm water increases metabolic rate. Fish have adapted to a wide range of temperatures. Some cold water species can tolerate temperatures below 32°F; while desert killifish can live in pools in Death Valley at temperatures in excess of 110°F. Native warm-water fish have a temperature tolerance range of about 34- 104°F although many species will become stressed near either of these extremes. There below 55°F activity and feeding slow. Above 95°F many warm-water fish begin to reach upper lethal temperature tolerance limits. Tropical fish such as the tilapia, cannot tolerate cold water. They become stressed when water reaches 60°F and die at water temperatures below 50°F. Trout and other coldwater fish will die when water temperature exceeds 70°F. Their optimum temperature is about 55-65°F and they are active down to 40°F. Fish must adjust to temperature changes gradually. A warm-water fish may survive in 100°F water if slowly acclimated to it; however, a sudden change from a water temperature of 65°F to 75°F may shock and kill the fish. The mean water temperature of Bira dam ranged from 23.97-24.35°C suitable for

common carp fish production. Temperature variation among sampling sites is described in Figure 3.

Turbidity


Water turbidity refers to the quantity of suspended material, which interferes with light penetration in the water column. In water bodies, water turbidity can result from planktonic organisms or from suspended clay particles. Turbidity limits light penetration, thereby limiting photosynthesis in the bottom layer. Higher turbidity can cause temperature and DO stratification in water bodies. Planktonic organisms are desirable when not excessive, but suspended clay particles are undesirable. It can cause clogging of gills or direct injury to tissues of aquatic organisms. Erosion or the water itself can be the source of small (1-100 nm) colloidal particles responsible for the unwanted turbidity. The particles repel each other due to negative-charges: this can be neutralized by electrolytes resulting in coagulation. It is reported that alum and ferric sulfate are more effective than hydrated lime and gypsum in removing clay turbidity. Both alum and gypsum have acid reactions and can depress pH and total alkalinity, so the simultaneous application of lime is recommended to maintain the suitable range of pH. Treatment rates depend on the type of soil. The turbidity value measured in NTU was higher (21.26-27.27) in Bira dam than Tekeze dam (8-11).the bigger difference might be due to highly degraded watershed of Bira dam resulted higher siltation. Turbidity variation among sites during sampling periods is described in Figure 4.

Conductivity

The values of Electrical conductivity (EC) ranged from 260 to 300 $\mu\text{S cm}^{-1}$ in Tekeze . Total dissolved Conductivity is related to the concentrations of total dissolved solids and major ions. The conductivity of most freshwaters ranges from 10 to 1000 $\mu\text{S cm}^{-1}$, but may exceed 1000 $\mu\text{S cm}^{-1}$, especially in polluted waters, or those receiving large quantities of land run-off [13]. The conductivity value measured in $\mu\text{S cm}^{-1}$ was higher (393.83-402.00) than Tekeze dam(260-300) and Tendaho reservoir (569). The higher conductivity in Bira dam and Tendaho reservoir might be their geological characteristics containing many cations. The conductivity variation among sites during sampling duration showed in Figure 5.

Conclusion and Recommendation

Bira dam is used as source of irrigation water, livestock watering and water for washing clothes and basing. The excessive water extraction day and night without regulation, degraded watershed and absence of buffer zone resulted in siltation are major problems affecting water quality and quantity of the dam. The average depth of the dam

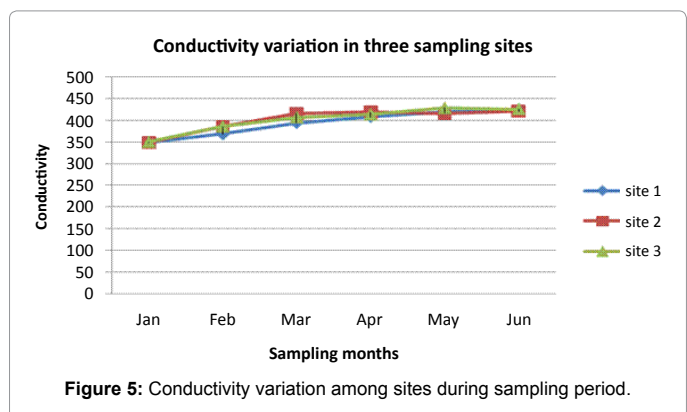

reduced from 20 metre to 4.33 m and its total area from 42 hectares to 18 hectares. The dam littoral area mainly is devoid of vegetation that may support fauna and flora including fish species. As a side line activity during data collection Bira dam user association has been established and training on sustainable water utilization and watershed management was delivered to these individuals. All members of the association should actively involve in watershed Bira dam management for sustainable utilization of the resource.

Acknowledgment

The researchers would like to thank Organizations, Kemissie and Bati Agriculture and Rural Development Offices for positive response during request for transport facilities. We are also delighted to thank Mr.Fisha Woldemariam for his unreserved effort during data collection.

References

1. FAO (2001) FAO fisheries and aquaculture Ethiopia, Ethiopia.
2. Henderson HF, Welcomme RL (1974) The relationship of yield to Morpho-Edaphic-Index and number of fishermen in African inland fisheries. *CIFA Occs Pap* 1: 19.
3. Imevbore AMA (1970) The chemistry of the River Niger in Kainji Reservoir Area. *Arch Hydrobiol* 67: 412-431.
4. Golubstov AS, Darkov AA, Dgebuadze YY, Mina MV (1995) An Artificial key to fish species of the Gambela region (The White Nile basin in the limits of Ethiopia). Joint Ethio-Russian Biological expedition, Addis Ababa, Ethiopia, 84.
5. UNESCO (1996) Water Quality Assessments - A Guide to Use Of Biota, Sediments and Water in Environmental Monitoring – 2nd edn Deborah Chapman, UK.
6. Sidnei MT, Fakio ALT, Maria CR, Francis AE, Adaunto F (1992) Seasonal variation of some limnological factors of Lagoa does Guarana, a Varzea lake of the Rio Paranana State of Mato Grosso do Sul, Brazil. *Rev Hydrobiol* 25: 269-276.
7. Djukic N, Maletin S, Pujin V, Ivanc A, Milajonovic B (1994) Ecological assessment of water quality of Tisze by physico-chemical and biological parameters. *Tisca Szeged* 28: 37-40.
8. Dumont HJ (1999) The species richness of reservoir plankton and the effect of reservoirs on plankton dispersal (with particular emphasis on rotifers and cladocerans). In: J.G. Tundisi and M. Straskraba edn. *Theoretical Reservoir Ecology and its Applications*. IIE, Backhuys Publishers, Brazilian Academy of Science: 477-491.
9. Kondratyev K, Pozdnyakov D V (1998) Water quality remote sensing in the visible spectrum. *International Journal of Remote Sensing* 19: 957-979.
10. Seker D Z, Goksel C, Kabdasli S, Musaoglu N, Kaya S (2003) Investigation of coastal morphological changes due to river basin characteristics by means of remote sensing and GIS techniques. *Water Sci Technol* 48: 135-142.
11. Amhara Livelihood Zone Reports (ALZR) (2007) Bati Woreda, Oromiya Administrative Zone. South Wollo & Oromia Eastern Lowland Sorghum and Cattle Livelihood Zone.
12. Tepe Y, Turkmen A, Mutlu E, Ates A (2005) some physico-chemical characteristics of Yarselli Lake, Turkey. *Turkish Journal of Fisheries and Aquatic Sciences* 5: 35-42.
13. American Public Health Association (APHA) (1995) Standard methods for the examination of water and wastewater, (19th edn). American Public Health Association, Washington DC, USA.

Citation: Tessema A, Mohammed A, Birhanu T, Negu T (2014) Assessment of Physico-chemical Water Quality of Bira Dam, Bati Wereda, Amhara Region, Ethiopia. *J Aquac Res Development* 5: 267. doi:[10.4172/2155-9546.1000267](https://doi.org/10.4172/2155-9546.1000267)

Submit your next manuscript and get advantages of OMICS Group submissions

Unique features:

- User friendly/feasible website-translation of your paper to 50 world's leading languages
- Audio Version of published paper
- Digital articles to share and explore

Special features:

- 350 Open Access Journals
- 30,000 editorial team
- 21 days rapid review process
- Quality and quick editorial, review and publication processing
- Indexing at PubMed (partial), Scopus, EBSCO, Index Copernicus and Google Scholar etc
- Sharing Option: Social Networking Enabled
- Authors, Reviewers and Editors rewarded with online Scientific Credits
- Better discount for your subsequent articles

Submit your manuscript at: <http://www.omicsonline.org/submission>

