

Commentary on Appropriate Wastewater Treatment System for a Natural Rubber Processing Factory

Tanikawa D*

Department of Civil and Environmental Engineering, National Institute of Technology, Kure College, Japan

Abstract

In this commentary, the process performance of natural rubber processing wastewater systems was evaluated and compared. The key factors evaluated in here comprised the following: the type of wastewater, the prevention of system clogging by coagulated rubber, and the reduction of greenhouse gas (GHG) emissions. This commentary examined these variables in existing systems and in a pilot-scale reactor system for wastewater treatment. Then an appropriate wastewater treatment system was proposed.

Keywords:

Natural rubber processing wastewater; Greenhouse gas emissions; Two stage UASB-DHS system; Sulfate reduction; Energy and resource recovery

Introduction

The natural rubber industry is one of the most important agro-industries in South-east Asia [1]. In a natural rubber processing factory, natural rubber latex (NR latex) extracted from para rubber trees is processed into three types of rubber products: ribbed smoked sheet (RSS) rubber, technically specified rubber (TSR), and concentrated latex (CL) [2-4]. Both RSS and TSR are categorized as block rubber, which is produced by the coagulation of NR latex. Conversely, the centrifugation of NR latex produces CL.

On average, 20 m³ of wastewater is discharged for each ton of rubber produced [5]. The major pollutants in the wastewater are ammonia and organic acids such as acetic acid and formic acid, used to preserve and coagulate NR latex, respectively [6]. Furthermore, CL wastewater contains high concentrations of sulfate. Sulfuric acid is used in the processing of skim latex. Currently, open-type, anaerobic-aerobic systems, such as conventional lagoon systems, are used to treat wastewater [7]. However, these systems have high environmental loading of greenhouse gas (GHG) emissions, low effluent water quality, malodor, groundwater pollution, and other negative environmental effects [8,9]. Therefore, an appropriate wastewater treatment system for the natural rubber industry is required [10]. In this commentary, the performance of both existing open-type wastewater treatment systems, i.e., the pilot-scale two-stage up-flow anaerobic sludge blanket (UASB) and the down-flow hanging sponge (DHS) reactor systems (two-stage UASB-DHS systems), were compared. Finally, an appropriate wastewater treatment system was proposed based on the findings.

The process performance of existing open-type wastewater treatment systems in natural rubber processing factories

Tanikawa et al. investigated the process performance of four existing treatment systems for treating natural rubber processing wastewater in Thailand (one factory) and Vietnam (three factories) [11-13]. These factories applied the open-type, anaerobic-aerobic system for wastewater treatment (Figure 1). Most of the factories achieved the effluent standard or water quality in the final effluent water (in the Vietnam factories, standard B). Process performance of these systems was similar with other wastewater treatment system of Vietnamese and Malaysian natural rubber processing factories [1-5]. However, these factories consumed

large amounts of electricity for wastewater treatment, particularly for the aerobic treatment of CL wastewater and in the post-treatment phase of anaerobic treatment. In case of two Vietnamese factories (factory B and C), power consumption for wastewater treatment was higher than that for natural rubber production due to the stricter effluent standard required for nitrogen compounds. Furthermore, methane and nitrous oxide were emitted as GHGs from the anaerobic treatment system; nitrous oxide accounted for 65% of the total GHG emissions (surveyed at factory D). In general, methane is considered to be the main GHG emitted from open-type anaerobic systems that treat organic wastewater. GHG emissions from natural rubber processing wastewater treatment systems were not considered because in this treatment process, the chemical oxygen demand (COD) concentration is lower than that seen in other agro-industrial wastewaters, such as palm oil mill effluent (POME) and molasses wastewater. However, the potential for the nitrous oxide to be emitted from natural rubber processing wastewater treatment systems was estimated to be approximately the same as methane emissions emitted from POME treatment. Therefore, the natural rubber industry should be considered as a target industry for clean development mechanism applications, as is the palm oil industry.

The process performance of the two-stage UASB-DHS system for the treatment of CL and RSS wastewater

Tanikawa et al. conducted a pilot-scale experiment of a two-stage UASB-DHS system (Figure 2) for treating CL wastewater, a highly contaminated wastewater containing high concentrations of organic matter, ammonia nitrogen, and sulfate, in Thailand (at factory A) [13]. The system achieved 95.7% of COD removal at 0.8 kg COD/(m³.d). In the treatment of sulfate-rich wastewater, methanogenesis was inhibited by the hydrogen sulfide that was produced by sulfate reduction [14]. In the first stage of the UASB, 80% of the COD removed was degraded by sulfate reduction, with more than 90% sulfate consumption. As a result, both generation and inhibition of hydrogen sulfide were reduced

*Corresponding author: Tanikawa D, Department of Civil and Environmental Engineering, National Institute of Technology, Kure College, Japan, E-mail: tanikawa@kure-nct.ac.jp

Received July 05, 2017; Accepted July 11, 2017; Published July 18, 2017

Citation: Tanikawa D (2017) Commentary on Appropriate Wastewater Treatment System for a Natural Rubber Processing Factory. J Microb Biochem Technol 9:159-161. doi: 10.4172/1948-5948.1000360

Copyright: © 2017 Tanikawa D. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

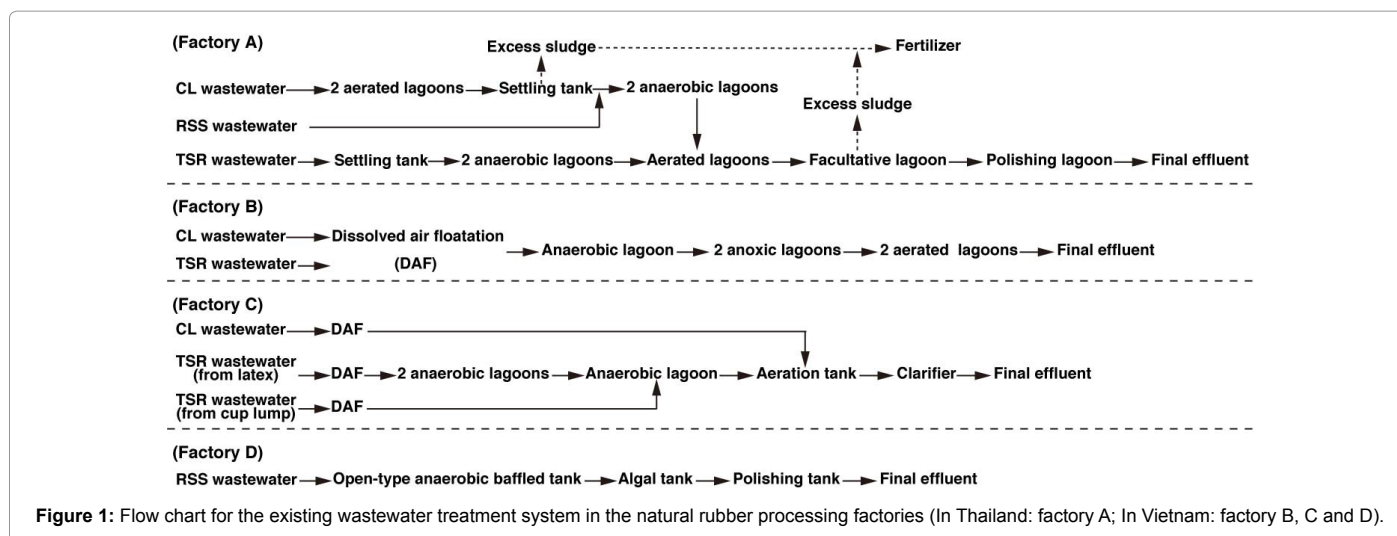


Figure 1: Flow chart for the existing wastewater treatment system in the natural rubber processing factories (In Thailand: factory A; In Vietnam: factory B, C and D).

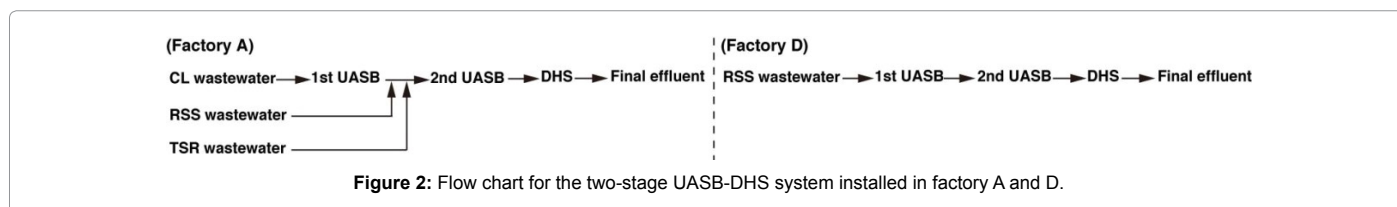


Figure 2: Flow chart for the two-stage UASB-DHS system installed in factory A and D.

Waste water treatment system	CDO removal (%)	GHG s Emission (t-CO ₂ e/m ³ -ww)	Power consumption (k Wh/m ³ -ww)
Factory A	92.4	0.072	0.5
Factory B	97.6	0.192	9
Factory C	97.6	0.175	4.6
Factory D	94.5	0.157	0.001
Two stage UASB-DHS system	94.9	0.011	0.05

Table 1: Process performance of wastewater treatment system in factory A, B, C, D and two-stage UASB-DHS system.

in the second stage of the UASB. Therefore, it was suggested that by separating the stages of COD removal caused by sulfate reduction, methane production, a higher efficiency of CL wastewater treatment could be achieved. Furthermore, the power consumption of the two-stage UASB-DHS system was estimated to be 95% less than that of the existing activated sludge system.

Watari et al. conducted a pilot-scale experiment of the two-stage UASB-DHS system (Figure 2) for the treatment of RSS wastewater, which contained residual rubber particles, in Vietnam (at factory D) [15]. The system achieved 94.9% COD removal at 1.5 kg COD/(m³.d). In case of RSS wastewater treatment, the system was clogged due to the coagulation of rubber particles in the wastewater. In addition, retained sludge containing rubber particles floated in the first stage of the UASB treatment due to its lower specific gravity. This material washed out in the second stage of the UASB. At this instance, the second stage of the UASB was configured as a sedimentation tank. Therefore, recovery of residual rubber particles in the wastewater should be considered to prevent system failure in RSS wastewater treatment. Regarding GHG emissions, the two-stage UASB-DHS system reduced 92% of GHG emissions compared with existing wastewater treatment system. These results indicated that a closed system can reduce nitrous oxide by recovery in addition to reducing methane emissions.

In both CL and RSS wastewater treatments, the DHS achieved a higher removal efficiency of COD and nitrogen with less aeration than the existing aerobic systems, such as aerated lagoons and activated sludge systems. Furthermore, the recovered methane was estimated to meet the standards of operation for natural rubber production wastewater treatment systems (Figure 2 and Table 1).

Table 1 shows the process performance of wastewater treatment system in factory A, B, C, D and two-stage UASB-DHS system. These results indicated that two-stage UASB-DHS system has advantages for not only COD removal, but also reduction of GHG emissions and power consumption.

Conclusion

In the treatment of natural rubber processing wastewater, hydrogen sulfide inhibition and the clogging of the system by coagulated rubber need to be considered in the wastewater processing method used for CL and block rubber, respectively. In addition, both GHG emissions and power consumption need to be reduced in wastewater treatment. Hydrogen sulfide inhibition was prevented during COD removal by sulfate reduction and methane production in the two stage system. Both GHG emissions and power consumption were reduced by the application of a closed anaerobic system. However, coagulated rubber still clogged the system. In currently used open-type wastewater treatment systems,

accumulation of coagulated rubber was confirmed at the surface and it was recovered later in the process as a rubber resource. However, GHGs were emitted from this system. Therefore, a pretreatment system for rubber recovery without the associated GHG emissions is required. Hence, a combination system of both an anaerobic baffled reactor (ABR), which is a high-rate closed anaerobic system, and a DHS (ABR-DHS system) was proposed for natural rubber processing wastewater treatment. The ABR separated wastewater treatment into phases, which included rubber recovery, hydrolysis, acidification, sulfate reduction, and methane production by compartmentalization. In addition, ABR demonstrated a high performance of solid/liquid separation. Thus, ABR can achieve rubber resource recovery, sulfate reduction, and methane recovery in a single reactor. In future, our research of the ABR-DHS system for natural rubber processing wastewater treatment will be reported.

Acknowledgement

This research was supported by the ESCANBER (Establishment of Carbon-Cycle-System with Natural Rubber) project supported by the JST/JICA, SATREPS (Science and Technology Research Partnership for Sustainable Development), JSPS KAKENHI (Grant No.: 16K18176) and Iwatani Foundation's Research Grant, Japan.

References

1. Mitra M, Che Man H, Ali Hassan M, Lai Yee P (2010) Treatment of wastewater from rubber industry in Malaysia. Afr J Biotechnol 9: 6233-6243.
2. Tekasakul P, Tekasakul S (2006) Environmental problems related to natural rubber production in Thailand. J Aerosol Res 21: 122-129.
3. Jawjit S. et al. (2010) Anaerobic mesophilic and thermophilic treatment of concentrated latex processing wastewater in two-stage up flow anaerobic sludge blanket (UASB). J Int Environ Appl Sci 5: 329-341.
4. Siriuma J, Warit J, Winai L (2010) Greenhouse gas emissions from rubber industry in Thailand. J Clean Prod 18: 403-411.
5. Nguyen NH, Luong TT (2012) Situation of wastewater treatment of natural rubber latex processing in the Southeastern region, Vietnam. J Viet Environ 2: 58-64.
6. Thongnuekhang V, Puetpaiboon U (2004) Nitrogen removal from concentrated latex wastewater by land treatment. J Sci Technol 26: 521-528.
7. Chaiparapatand S, Sdoodee S (2007) Effects of wastewater recycling from natural rubber smoked sheet production on economic crops in southern Thailand. Resour Conserv Recy 51: 577-590.
8. Rattanapan C, Piyarat B, Duangporn K (2009) Removal of H₂S in down-flow GAC biofiltration using sulfide oxidizing bacteria from concentrated latex wastewater. Bioresour Technol 100:125-130.
9. Smitha HSS, Raghavendra MP, Shruthi S, Girish K (2012) Bioremediation of rubber processing industry effluent by *Arthrobacter* sp. Int J Res Environ Sci Technol 2: 31-34.
10. Syutsubo K (2015) Survey of process performance and greenhouse gases emission of wastewater treatment system in natural rubber processing factories. Proceedings of International Rubber Conference.
11. Tanikawa D (2015) Pilot study of wastewater treatment in natural rubber processing factory. Proceedings of International Rubber Conference.
12. Tanikawa D, Kazuaki S, Watari T, Yuma M, Hatamoto M, et al. (2016) Greenhouse gas emissions from open-type anaerobic wastewater treatment system in natural rubber processing factory. J Clean Prod 119: 32-37.
13. Tanikawa D, Syutsubo K, Hatamoto M, Fukuda M, Takahashi M, et al. (2016) Treatment of natural rubber processing wastewater using a combination system of a two-stage up-flow anaerobic sludge blanket and down-flow hanging sponge system. Wat Sci Technol 73: 1777-1784.
14. Lens PNL, Visser A, Janseen AJH (1998) Biological treatment of sulfate-rich wastewater. Critic Rev Environ Sci Technol 28: 41-88.
15. Watari T, Mai TC, Tanikawa D, Hirakata Y, Hatamoto M, et al. (2017) Performance evaluation of the pilot scale up flow anaerobic sludge blanket – down flow hanging sponge system for natural rubber processing wastewater treatment in South Vietnam. Bioresour Technol 237: 204-212.

Citation: Tanikawa D (2017) Commentary on Appropriate Wastewater Treatment System for a Natural Rubber Processing Factory. J Microb Biochem Technol 9:159-161. doi: [10.4172/1948-5948.1000360](https://doi.org/10.4172/1948-5948.1000360)

OMICS International: Open Access Publication Benefits & Features

Unique features:

- Increased global visibility of articles through worldwide distribution and indexing
- Showcasing recent research output in a timely and updated manner
- Special issues on the current trends of scientific research

Special features:

- 700+ Open Access Journals
- 50,000+ editorial team
- Rapid peer review process
- Quality and quick editorial, review and publication processing
- Indexing at major indexing services
- Sharing Option: Social Networking Enabled for better prominence and citations
- Authors, Reviewers and Editors rewarded with online Scientific Credits
- Best discounts for your subsequent articles

Submit your manuscript at: <http://www.editorialmanager.com/jmbt>