

# Matlab Source Code for Species Transport through Nafion Membranes in Direct Ethanol, Direct Methanol, and Direct Glucose Fuel Cells

Summerfield JH\* and Manley MW

Department of Chemical and Physical Sciences, Missouri Southern State University, USA

## Abstract

A simple simulation of chemical species movement is presented. The species traverse a Nafion membrane in a fuel cell. Three cells are examined: direct methanol, direct ethanol, and direct glucose. The species are tracked using excess proton concentration, electric field strength, and voltage. The Matlab computer code is provided.

**Keywords:** Mat lab; Fuel cells; Polymers

## Introduction

An efficient fuel cell could replace combustion engines and advance the goal of being less oil dependent. For a fuel cell, an accurate mathematical model is an important tool for optimizing fuel cell efficiency, which makes fuel cell model a current research topic [1,2]. The novelty of this work is that three fuel cells are modelled apart from the typical hydrogen oxygen fuel cell. Furthermore, a Matlab computer program is presented so that others may investigate their own systems.

The systems studied in this work involve chemical species transport with an ion exchange polymer composite matrix supported on an electrode surface. The ion exchange polymer that is used to modify electrodes in this work is Nafion, the structure of which is shown in Figure 1.

Structurally Nafion is a Teflon-like, hydrophobic, fluorocarbon backbone with sidechains that terminate in a hydrophilic sulfonic acid. When Nafion is in contact with solution, the proton from the sulfonic acid can easily exchange with cationic species in solution. Nafion provides a cation selective matrix where cationic redox species are concentrated within the film. Because Nafion is a polymer, mass transport in the system is slowed. In the acid form, Nafion provides ion conduction through the acidic proton about the sulfonic acid.

A fuel cell is similar to a battery in that it converts chemical energy into electrical energy and is better than a battery because it does not undergo charge/discharge cycles. A fuel cell provides power as long as it is provided fuel, similar to a combustion engine. A fuel cell is better than a combustion engine because it converts chemical energy directly into electrical energy without moving through a pressure-volume cycle and so is a more efficient process. The Carnot limitations restrict combustion engines to a theoretical maximum efficiency of

40%. Because a fuel cell converts chemical energy to electrical energy without mechanical cycles, there are no thermodynamic limitations and so the theoretical efficiency is 100%.

A fuel cell consists of two electrodes separated by an ion conducting membrane. As is typical, the membrane is Nafion and the electrodes are graphite. When catalyst coated electrodes are pressed against the membrane, interfacial zones are created. The electrochemical reactions occur only in these interfacial zones. A local difference in the concentration of anions and cations is produced because of these reactions. This separation of charge creates a potential difference across the cell. The slightly resistive nature of the electrodes and Nafion causes a potential loss in these regions. Table 1 shows the fuel cells investigated in this work [3].

## The Model

Consider a one dimensional model. Define  $C_j(x, t)$  as the concentration in mol/cm<sup>3</sup>,  $J_j(x, t)$  as the flux (mol cm<sup>-2</sup> s<sup>-1</sup>) and  $\phi(x, t)$  as the potential (volts). The Nernst-Plank equation relates these quantities.

$$J_j(x,t) = -D_j \frac{\partial C_j(x,t)}{\partial x} - \frac{z_j F D_j}{RT} C_j(x,t) \frac{\partial \phi(x,t)}{\partial x} \quad (1)$$

Where  $D_j$  is the diffusion rate of species  $j$  (cm<sup>2</sup> s<sup>-1</sup>),  $z_j$  is the charge on species  $j$ ,  $F$  is Faraday's constant (C mol<sup>-1</sup>),  $R$  is the gas law constant (J K<sup>-1</sup> mol<sup>-1</sup>), and  $T$  is temperature (K).

More specifically,  $C_j(x, t)$  is the concentration of  $j$  needed to neutralize the sulfonates concentration. Let  $N$  be the concentration of sulfonates in the Nafion.

For simplification, the relation between flux and concentration is relied on,

$$\frac{\partial C_j(x,t)}{\partial t} = - \frac{\partial J_j(x,t)}{\partial x} \quad (2)$$

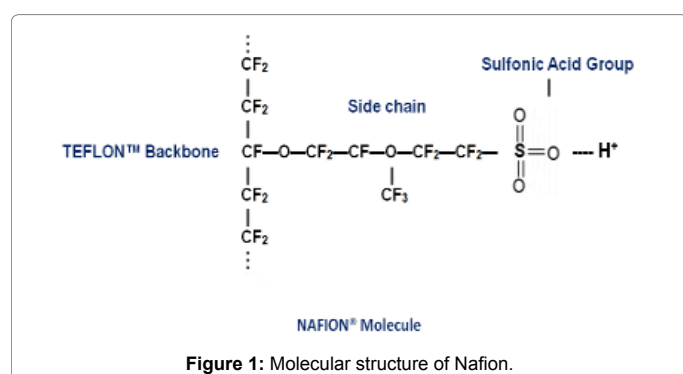


Figure 1: Molecular structure of Nafion.

\*Corresponding author: Summerfield JH, Department of Chemical and Physical Sciences, Missouri Southern State University, USA, Tel: 417-625-9717; E-mail: [summerfield-j@mssu.edu](mailto:summerfield-j@mssu.edu)

Received November 14, 2016; Accepted November 28, 2016; Published November 30, 2016

Citation: Summerfield JH, Manley MW (2016) Matlab Source Code for Species Transport through Nafion Membranes in Direct Ethanol, Direct Methanol, and Direct Glucose Fuel Cells. J Phys Math 7: 203. doi: 10.4172/2090-0902.1000203

Copyright: © 2016 Summerfield JH, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Fuel Cell Type	Anode	Cathode	Voltage (V)
Methanol	$\text{CH}_3\text{OH} + 6\text{OH}^- \Rightarrow \text{CO}_2 + 5\text{H}_2\text{O} + 6\text{e}^-$	$3/2\text{O}_2 + 3\text{H}_2\text{O} + 6\text{e}^- \Rightarrow 6\text{OH}^-$	1.12
Ethanol	$\text{CH}_3\text{CH}_2\text{OH} + 2\text{OH}^- \Rightarrow \text{CH}_3\text{COOH} + 3\text{H}_2\text{O} + 4\text{e}^-$ , $\text{CH}_3\text{CH}_2\text{OH} + 12\text{OH}^- \Rightarrow 2\text{CO}_2 + 9\text{H}_2\text{O} + 12\text{e}^-$	$3\text{O}_2 + 6\text{H}_2\text{O} + 12\text{e}^- \Rightarrow 12\text{OH}^-$	1.17
Glucose	$\text{C}_6\text{H}_{12}\text{O}_6 + \text{H}_2\text{O} \Rightarrow \text{C}_6\text{H}_{12}\text{O}_7 + 2\text{H}^+ + 2\text{e}^-$	$\text{O}_2 + 2\text{H}^+ + 2\text{e}^- \Rightarrow \text{H}_2\text{O}$	1.30

Table 1: The fuel cell type, the anode reaction, the cathode reaction, and the cell voltages for this work.

Using Eq. (1), Eq. (2), and our newest definitions,

$$\frac{\partial C_j(x,t)}{\partial t} = D_j \frac{\partial^2 C_j(x,t)}{\partial x^2} + \frac{z_j F D_j}{RT} \left[ (C_j(x,t) + N) \frac{\partial \phi(x,t)}{\partial x} \right]_x \quad (3)$$

The total current,  $i$ , at steady state is set by the steady state flux,  $J_j$ ,

$$i = \sum_j i_j = - \sum_j n F A J_j \quad (4)$$

where  $n$  is the number of electrons involved in the redox reaction and  $A$  is the surface area of the electrode. This work considers each chemical species independently so Eq. (4) reduces to

$$i = - n F A J_j. \quad (5)$$

Turning to the relation between concentration and electric potential energy, Poisson's equation is relied on

$$\frac{\partial^2 \phi(x,t)}{\partial x^2} = - \frac{F}{\varepsilon} \sum_j z_j C_j(x,t) \quad (6)$$

where  $\varepsilon = \varepsilon_0 \varepsilon_r$  and is the relative permittivity.  $\varepsilon_0$  is the vacuum permittivity and  $\varepsilon_r$  is the dielectric constant. This is 20 for Nafion [4]. For the systems of interest, Eq. (6) becomes

$$\frac{\partial^2 \phi(x,t)}{\partial x^2} = - \frac{F}{\varepsilon} C_j(x,t). \quad (7)$$

Finally then, equations (3) and (7) are used to define the species movement over the Nafion membrane [5].

Equation (3) provides the transport equation with a condition on  $\phi''(C(x))$  as seen in Eq. (7). Instead of considering derivatives of the potential, it is replaced with a relation to the electric field,  $E(C(x))$

$$E(C(x)) = - \frac{\partial \phi(C(x))}{\partial x}. \quad (8)$$

This transforms Eq.(1) to

$$J = - D_j \frac{\partial C(x)}{\partial x} + \frac{F D_j}{RT} C(x) E(C(x)) \quad (9)$$

where  $J$  is the time independent, steady state. Equation (7) can also be recast,

$$\frac{\partial E(C(x))}{\partial x} = \frac{F}{\varepsilon} (C(x) - N). \quad (10)$$

Equations (9) and (10) appear to have no simulation problems. After a bit of examination they reveal themselves to be stiff partial differential equations. Standard methods were used to regularize them [6] and a Runge-Kutta scheme was used for the simulation's calculations [7].

Let  $C(x) = N(1 + \tilde{C}(x))$  then the above become

$$J = - D_j N \frac{\partial \tilde{C}(x)}{\partial x} + \frac{F D_j N}{RT} (\tilde{C}(x) + 1) E(\tilde{C}(x)) \quad (11)$$

and

$$\frac{\partial E(\tilde{C}(x))}{\partial x} = \frac{F N}{\varepsilon} \tilde{C}(x). \quad (12)$$

Let  $x = l\tilde{x}$  where  $l$  is the Nafion film thickness in cm and the above can be rewritten as

$$J = - \frac{D_j N}{l} \frac{\partial \tilde{C}(x)}{\partial \tilde{x}} + \frac{F D_j N}{RT} (\tilde{C}(\tilde{x}) + 1) E(\tilde{C}(\tilde{x})) \quad (13)$$

and

$$\frac{\partial E(\tilde{C}(\tilde{x}))}{\partial \tilde{x}} = \frac{F N l}{\varepsilon} \tilde{C}(\tilde{x}). \quad (14)$$

It was thought that the electric field values might be too large and

create problems in the simulation so  $E(\tilde{C}(\tilde{x}))$  was scaled by  $10^{-3}$ . That is  $\tilde{E}(\tilde{C}(\tilde{x})) = 10^{-3} E(\tilde{C}(\tilde{x}))$ . This scaling and rearrangement yields

$$10^{-3} \frac{\partial \tilde{C}(x)}{\partial \tilde{x}} = -10^{-3} \frac{l J}{D_j N} + \frac{F l}{RT} (\tilde{C}(\tilde{x}) + 1) \tilde{E}(\tilde{C}(\tilde{x})) \quad (15)$$

and

$$\frac{\partial \tilde{E}(\tilde{C}(\tilde{x}))}{\partial \tilde{x}} = 10^{-3} \frac{F N l}{\varepsilon} \tilde{C}(\tilde{x}). \quad (16)$$

Simplifications can now take place. Equations (15) and (16) now become

$$\delta \frac{\partial \tilde{C}(x)}{\partial \tilde{x}} = \alpha + \beta (\tilde{C}(\tilde{x}) + 1) \tilde{E}(\tilde{C}(\tilde{x})) \quad (17)$$

and

$$\frac{\partial \tilde{E}(\tilde{C}(\tilde{x}))}{\partial \tilde{x}} = \gamma \tilde{C}(\tilde{x}). \quad (18)$$

Where  $\alpha = -10^{-3} l J / D_j N$ ,  $\beta = F l / RT$ ,  $\gamma = 10^{-3} F N l / \varepsilon$ , and  $\delta = 10^{-3}$ .

The simplifications continue. Let  $\hat{E}(\tilde{C}(\tilde{x})) = \tilde{E}(\tilde{C}(\tilde{x})) - E_e$  where  $E_e = \alpha / \beta$ . Then


$$\begin{aligned} \delta \frac{\partial \tilde{C}(x)}{\partial \tilde{x}} &= \alpha + \beta (\tilde{C}(\tilde{x}) + 1) (\hat{E}(\tilde{C}(\tilde{x})) + E_e) \\ &= \alpha + \beta E_e + \beta E_e \tilde{C}(\tilde{x}) + \beta (\tilde{C}(\tilde{x}) + 1) \hat{E}(\tilde{C}(\tilde{x})) \\ &= \alpha + \beta \left( -\frac{\alpha}{\beta} \right) + \beta \left( -\frac{\alpha}{\beta} \right) \tilde{C}(\tilde{x}) + \beta (\tilde{C}(\tilde{x}) + 1) \hat{E}(\tilde{C}(\tilde{x})) \\ &= -\alpha \tilde{C}(\tilde{x}) + \beta (\tilde{C}(\tilde{x}) + 1) \hat{E}(\tilde{C}(\tilde{x})) \end{aligned} \quad (19)$$

and


$$\begin{aligned} \frac{\partial \hat{E}(\tilde{C}(\tilde{x}))}{\partial \tilde{x}} &= \gamma \tilde{C}(\tilde{x}) \\ \hat{E}(\tilde{C}(\tilde{x})) &= \tilde{E}(\tilde{C}(\tilde{x})) - E_e \end{aligned} \quad (20)$$

Fuel Cell Type	Diffusion Coefficient (cm <sup>2</sup> /s <sup>-1</sup> )	Reference
Methanol	$2.1 \times 10^{-5} \exp\left\{-\frac{20,460}{R}\left(\frac{1}{T}-\frac{1}{313}\right)\right\}$	[8]
Ethanol	$1.83 \times 10^{-5}$	[1]
Glucose	$6.5 \times 10^{-6}$	[9]

**Table 2:** Diffusion coefficients for the simulations.  $R$  is the ideal gas constant and  $T$  is temperature. The other parameters are found in the program.

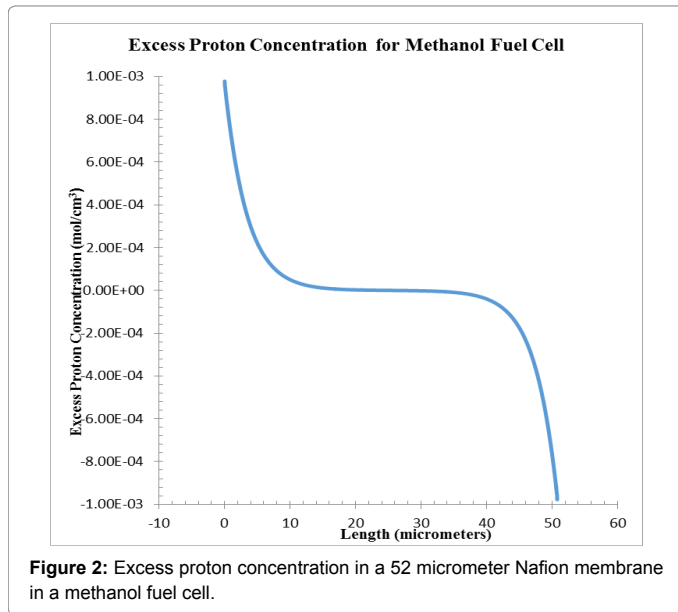

**Figure 2:** Excess proton concentration in a 52 micrometer Nafion membrane in a methanol fuel cell.

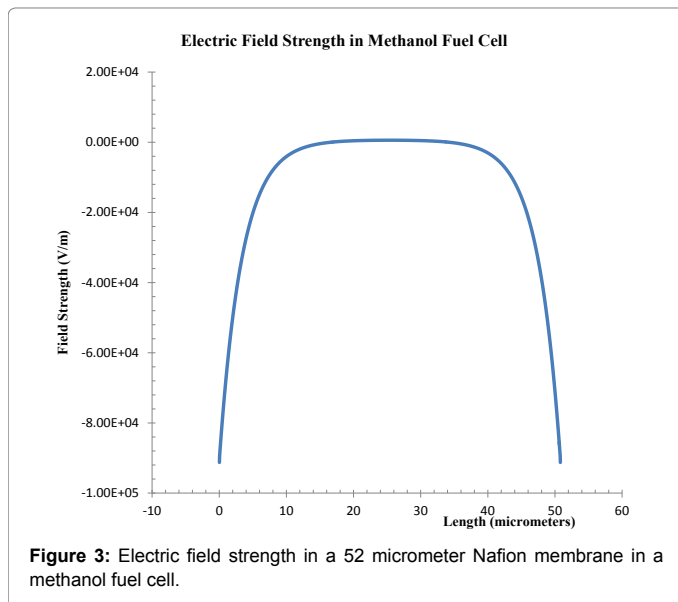

**Figure 3:** Electric field strength in a 52 micrometer Nafion membrane in a methanol fuel cell.

Finally let  $a = \alpha/\delta$ ,  $C = \gamma$ , and  $c = \gamma$  along with writing each equation as a function of  $\tilde{C}$  and  $\hat{E}$ .

$$\frac{\partial \tilde{C}(\tilde{x})}{\partial \tilde{x}} = -a\tilde{C}(\tilde{x}) + b\hat{E}(\tilde{C}(\tilde{x})) + b\tilde{C}\hat{E}(\tilde{C}(\tilde{x})) \quad (21)$$

and

$$\begin{aligned} \frac{\partial \hat{E}(\tilde{C}(\tilde{x}))}{\partial \tilde{x}} &= c\tilde{C}(\tilde{x}) \\ \hat{E}(\tilde{C}(\tilde{x})) &= \hat{E}(\tilde{C}(\tilde{x})) - E_e \end{aligned} \quad (22)$$


Equations (21) and (22) are the equations used in the Appendix A program. The diffusion coefficients shown in Table 2.

To verify that the simulation results were accurate, an equation with a fixed point in the center of the interval over which the simulation was ran was needed. The equation used was


$$\bar{C}(x) = \bar{E}(x) + \bar{V}(x) = \left(x - \frac{l}{2}\right)^2 + \frac{V_0}{l}x - \frac{V_0}{2} \quad (23)$$

where



$$\bar{E}(x) = \left(x - \frac{l}{2}\right)^2 \text{ and}$$

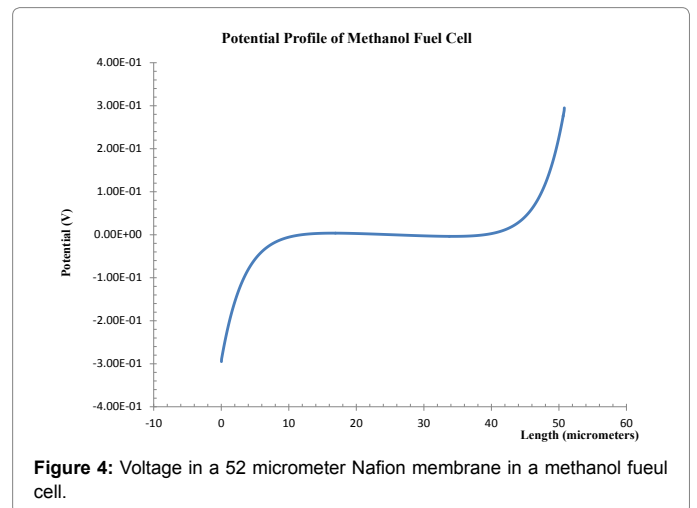

**Figure 4:** Voltage in a 52 micrometer Nafion membrane in a methanol fuel cell.

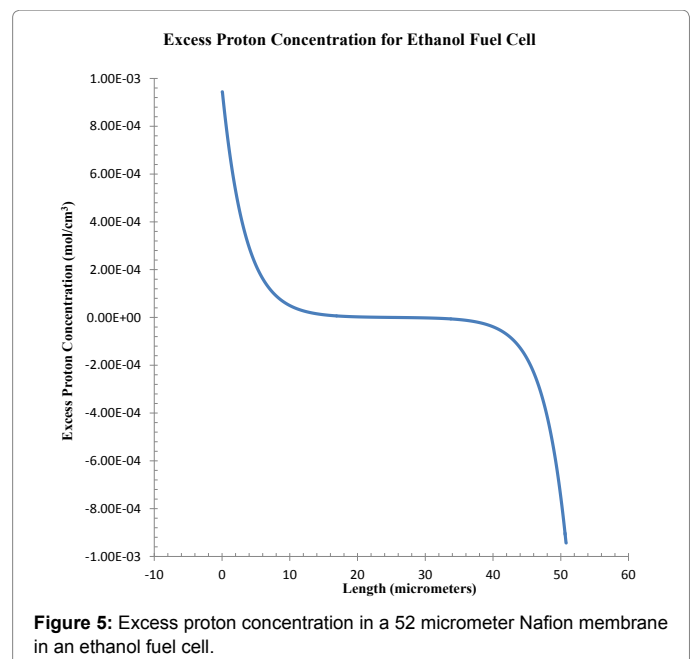

**Figure 5:** Excess proton concentration in a 52 micrometer Nafion membrane in an ethanol fuel cell.

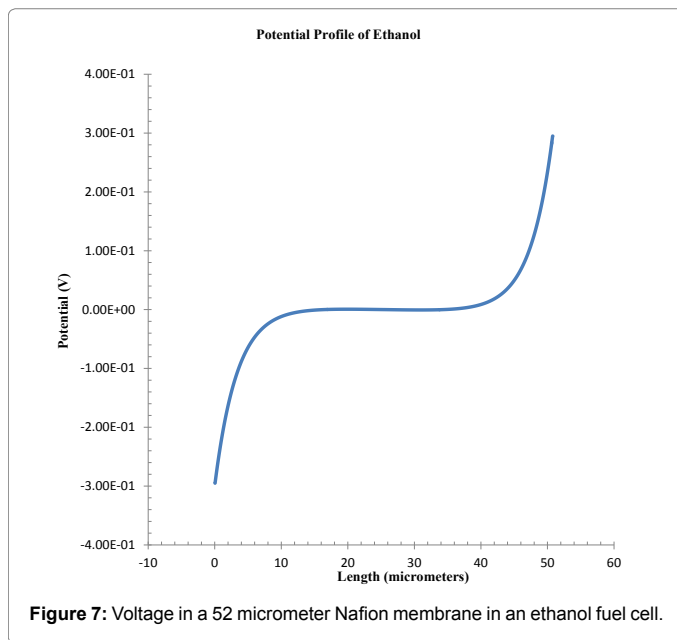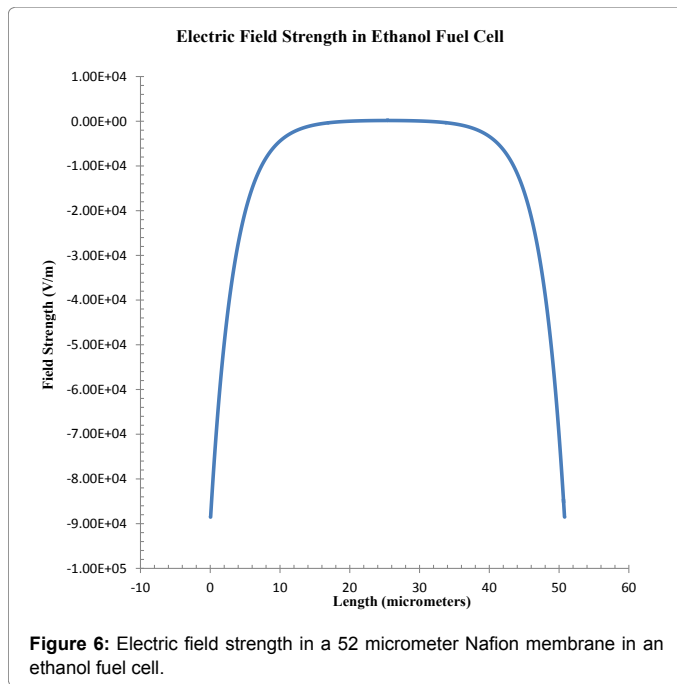

$$\bar{V}(x) = \frac{V_0}{l}x - \frac{V_0}{2} \quad (24)$$



The eigenvalue used in the simulation was the value that resulted from  $\frac{d\bar{C}}{dx}$  evaluated at  $x = l/2$ . These equations were entered into the simulation in the form


$$\begin{aligned} dy_1 &= y_2 + y_3 \\ dy_2 &= 2 \\ dy_3 &= 0 \end{aligned} \quad (25)$$

Where  $y_1 = \bar{C}(x)$ ,  $y_2 = \frac{d\bar{E}(x)}{dx}$  and  $y_3 = \frac{d\phi(x)}{dx}$ . The resulting curves were as expected, creating the correct parabola for  $y_1$  and the correct lines for  $y_2$  and  $y_3$ .

## Results and Discussion

For a 52 micrometer Nafion membrane, the excess proton concentration at the membrane, the electric field strength at the membrane, and the voltage at the membrane are shown for all three fuel cells in Figures 2-10. The simulation currently does not allow a thickness of 51 micrometers or less. This is likely because of the fixed point assumption and for a membrane 51 micrometers or less, one

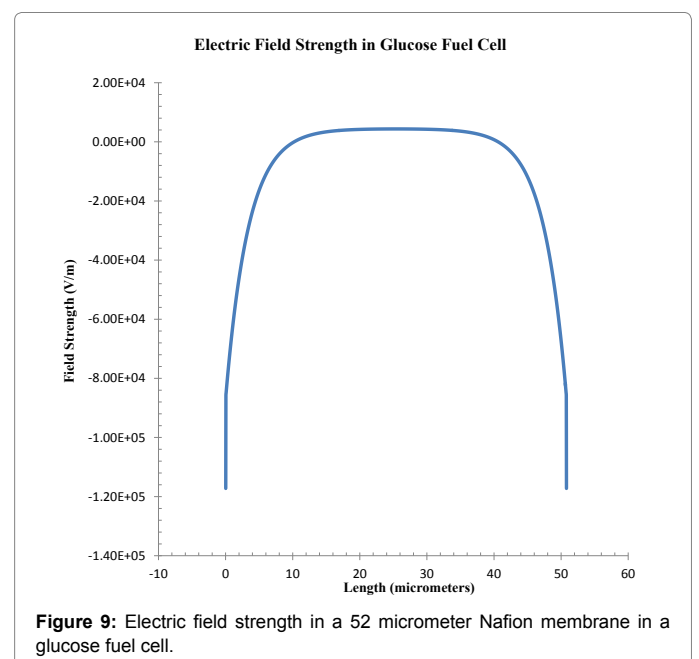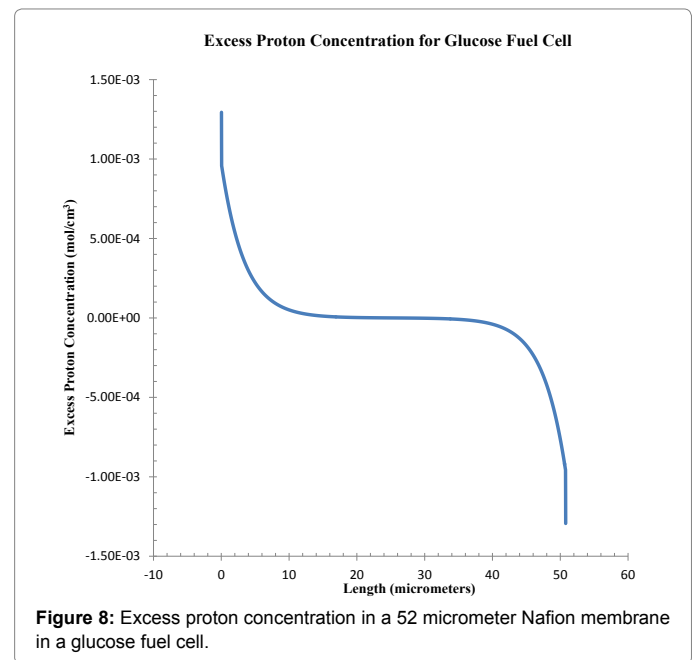

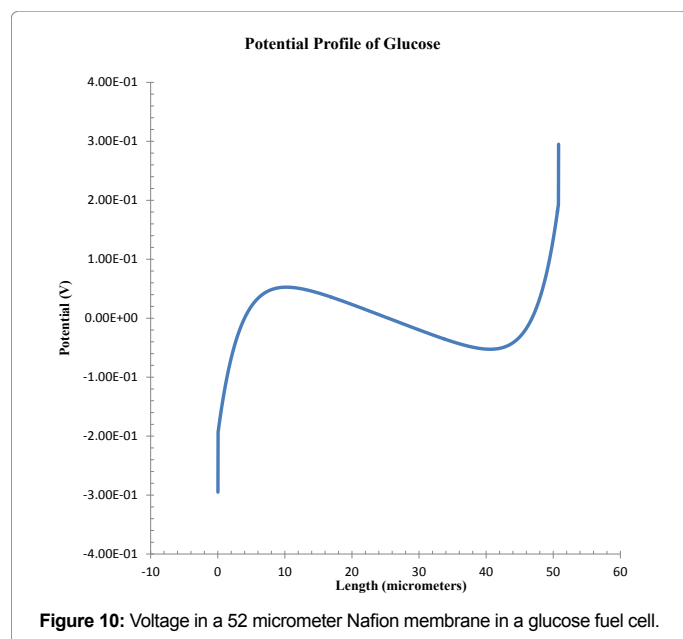

cannot assume the excess proton concentration is zero in the middle of the film or the position of the zero concentration is too uncertain. It is interesting the simulation breaks down at around the same thickness used in a fuel cell. It is not clear if this is the result of the simulation method or a characteristic of the modeling equations or the constraints on the system. Without the fixed point assumption, there is no interval within the film where the concentration of protons and Nafion is

neutral. This is why the simulation breaks down and could be why such thin films are not stable in fuel cells.

The shapes of the curves across the membrane are similar cell to cell. All are essentially invariant across the membrane. For the excess protons, the membranes show a neutral region across the membrane with steep gradients at boundaries that yield concentration polarizations. That is, protons build up at the anode edge and deplete at the cathode edge shown in Figures 2-10.

#### References

1. Andreadis G, Song S, Tsiakaras P (2006) Direct Ethanol Fuel Cell Anode Simulation Model. J of Power Sources 157: 657-665.
2. Deng H, Jiao D, Zu M, Chen J, Kui Jiao K, et al. (2015) Modeling of Passive Alkaline Membrane Direct Methanol Fuel Cell. Electro Acta 154: 430-446.
3. Hao YE, Wang X, Krewer U, Lei Li L, Scott K (2012) Direct Oxidation Fuel Cells: from Materials to Systems. Energy Environ Sci 5: 5668-5680.
4. Stephen JP, Reagor DW, Zawodzinski TA Jr (1998) High Frequency Dielectric Studies of Hydrated Nafion. J Electroanalytical Chem 459: 91-97.
5. Schmidt S (2010) Mathematical Models of Ion Transport Through Nafion Membranes in Modified Electrodes and Fuel Cells Without Electroneutrality. Ph. D. Dissertation, University of Iowa, Ames.
6. Secanell M, Carnes B, Suleman A, Djilali N (2007) Numerical Optimization of Proton Exchange Membrane Fuel Cell Cathodes. Electro. Acta 52: 2668-2682.
7. Kassam A (2005) Fourth-Order Time Stepping for Stiff PDEs. SIAM J of Sci Comput 4: 1214-1233.
8. Rosenthal NS, Vilekar SA, Datta R (2012) A Comprehensive Yet Comprehensible Analytical Model For The Direct Methanol Fuel Cell. J Power Sources 206: 129-143.
9. Pathak R, Basu S (2013) Mathematical Modeling and Experimental Verification of Direct Glucose Anion Exchange Membrane Fuel Cell. Electrochimica Acta 113: 42-53.

Citation: Summerfield JH, Manley MW (2016) Matlab Source Code for Species Transport through Nafion Membranes in Direct Ethanol, Direct Methanol, and Direct Glucose Fuel Cells. J Phys Math 7: 203. doi: [10.4172/2090-0902.1000203](https://doi.org/10.4172/2090-0902.1000203)

#### OMICS International: Open Access Publication Benefits & Features

##### Unique features:

- Increased global visibility of articles through worldwide distribution and indexing
- Showcasing recent research output in a timely and updated manner
- Special issues on the current trends of scientific research

##### Special features:

- 700+ Open Access Journals
- 50,000+ editorial team
- Rapid review process
- Quality and quick editorial, review and publication processing
- Indexing at major indexing services
- Sharing Option: Social Networking Enabled
- Authors, Reviewers and Editors rewarded with online Scientific Credits
- Better discount for your subsequent articles

Submit your manuscript at: <http://omicsonline.com/open-access/physical-mathematics.php>